

**Europäisches Patentamt** 

**European Patent Office** 

Office européen des brevets



(11) EP 0 780 804 A2

(12)

#### **EUROPEAN PATENT APPLICATION**

(43) Date of publication: 25.06.1997 Bulletin 1997/26

(51) Int. Cl.<sup>6</sup>: **G07B 17/02** 

(21) Application number: 96120495.5

(22) Date of filing: 19.12.1996

(84) Designated Contracting States: DE FR GB

(30) Priority: 19.12.1995 US 575107

(71) Applicant: PITNEY BOWES INC.
Stamford Connecticut 06926-0700 (US)

(72) Inventors:

Lee, David K.
 Monroe, CT 06468 (US)

Riley, David W.
 Easton, CT 06612 (US)

Ryan, Frederick W., Jr.
 Oxford, CT 06478 (US)


(74) Representative: Avery, Stephen John et al Hoffmann, Eitle & Partner, Patent- und Rechtsanwälte, Arabellastrasse 4 81925 München (DE)

## (54) Token generation process in an open metering system

(57) A method of issuing digital tokens in a open system meter comprising the steps of:

sending a request for digital tokens and predetermined postal information, including addressee information, from a host processor to a vault that is operatively coupled to the host processor; calculating in the vault in response to the request for tokens at least one digital token using the predetermined postal information; debiting postal funds in the vault;

issuing the digital token to the host processor; and storing the digital token and the predetermined postal information as a transaction record in the host processor for subsequent generation and printing of an indicia.

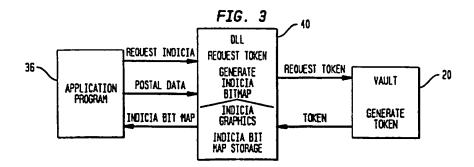

#### Description

The present invention relates to advanced postage payment systems and, more particularly, to advanced postage payment systems having pre-computed postage payment information.

The present application is related to the following U.S. Patent Applications Serial Nos. [Attorney Dockets E-415, E-417, E-418, E-419, E-420, E-421, E-444, E-452, E-463 and E-466], each filed concurrently herewith, and assigned to the assignee of the present invention.

The USPS is presently considering requirements for two metering device types: closed systems and open systems. In a closed system, the system functionality is solely dedicated to metering activity. Examples of closed system metering devices, also referred to as postage evidencing devices (PEDs), include conventional digital and analog postage meters wherein a dedicated printer is securely coupled to a metering or accounting function. In a closed system, since the printer is securely coupled and dedicated to the meter, printing cannot take place without accounting. Furthermore, printing occurs immediately after accounting is concluded.

In an open system, the printer is not dedicated to the metering activity, freeing system functionality for multiple and diverse uses in addition to the metering activity. Examples of open system metering devices include personal computer (PC) based devices with single/multi-tasking operating systems, multi-user applications and digital printers. An open system metering device is a PED with a non-dedicated printer that is not securely coupled to a secure accounting module.

When a PED prints a postage indicia on a mailpiece, the accounting register within the PED must always reflect that the printing has occurred. Postal authorities generally require the accounting information to be stored within the postage meter in a secure manner with security features that prevent unauthorized and unaccounted for postage printing or changes in the amounts of postal funds stored in the meter. In a closed system, the meter and printer are integral units, i.e., interlocked in such a manner as to ensure that the printing of a postage indicia cannot occur without accounting.

Since an open system PED utilizes a printer that is not used exclusively for printing proof of postage payment, additional security measures are required to prevent unauthorized printing evidence or postage payment. Such security measures include cryptographic evidencing of postage payment by PEDs in the open and closed metering systems. The postage value for a mail piece may be encrypted together with other data to generate a digital token. A digital token is encrypted information that authenticates the information imprinted on a mail piece including postage values.

Examples of systems for generating and using digital tokens are described in U.S. Patents Nos.

4,757,537, 4,831,555, 4,775,246, 4,873,645, and 4,725,718, the entire disclosures of which are hereby incorporated by reference. These systems employ an encryption algorithm to encrypt selected information to generate at least one digital token for each mailpiece. The encryption of the information provides security to prevent altering of the printed information in a manner such that any misuse of the tokens is detectable by appropriate verification procedures.

Typical information which may be encrypted as part of a digital token includes origination postal code, vendor identification, data identifying the PED, piece count, postage amount, date, and, for an open system, destination postal code. These items of information, collectively referred to as Postal Data, when encrypted with a secret key and printed on a mail piece provide a very high level of security which enables the detection of any attempted modification of a postal revenue block or a destination postal code. A postal revenue block is an image printed on a mail piece that includes the digital token used to provide evidence of postage payment. The Postal Data may be printed both in encrypted and unencrypted form in the postal revenue block. Postal Data serves as an input to a Digital Token Transformation which is a cryptographic transformation computation that utilizes a secret key to produce digit tokens. Results of the Digital Token Transformation, i.e., digital tokens, are available only after completion of the Accounting Process.

Digital tokens are utilized in both open and closed metering systems. However, for open metering systems, the non-dedicated printer may be used to print other information in addition to the postal revenue block and may be used in activity other than postage evidencing. In an open system PED, addressee information is included in the Postal Data which is used in the generation of the digital tokens. Such use of the addressee information creates a secure link between the mailpiece and the postal revenue block and allows unambiguous authentication of the mail piece.

Preferably, two Digital Tokens are used to authenticate Postal Data and postage payment. The first is produced by a Digital Token Transformation using a secret key held by the Postal Service and the mailer's PED. The second is produced by a Digital Token Transformation using a secret key held by the PED vendor and the mailer's PED. The fact that two independent entities hold separate verification secrets greatly enhances the security of the system because it provides the Postal Service and the vendor with independent means to authenticate the postal revenue block, and thus, verify postage payment. The use of the second Digital Token Transformation using the vendor's secret key is an optional part of the security which authenticates postage payment by a particular vendor's device. The use of two digital tokens (postal and vendor) is described in U.S. Patent No. 5,390,251 and pending European Patent Application Serial No. 95107216.4, filed May 12, 1995, both assigned to the assignee of the present 15

invention, the entire disclosures of which are hereby incorporated by reference.

As previously described, an inherent difference between closed metering systems and open metering systems is the printer. The printer in a closed metering system is a secure device that is dedicated for printing evidence of postage. Thus, the printing function in a closed metering system is dependent on the metering function. This contrasts an open metering system printer, which is a non-secure, non-dedicated printer that prints typical PC related documents in addition to printing evidence of postage. Thus, the printing function in an open metering system is independent of the metering function. The present invention provides a process in an open metering system for requesting, calculating, storing and issuing one or more digital tokens that can be used at a later time in the generation of one or more indicia images.

In accordance with the present invention some of the functionality typically performed in the vault of a conventional postage meter has been removed from the vault of a PC-based open metering system and is performed in the PC. It has been discovered that this transfer of functionality from the vault to the PC does not effect the security of the meter because the information being processed includes addressee information. It has also been discovered that in a PC-based open metering system tokens can be issued and then stored for generating and printing an indicia at a later time. It has further been discovered that a token can be reissued if the token is never printed or if a problem occurs preventing a printing of an indicia with the token.

The present invention provides a token generation process for an open metering system, such as a PC-based metering system that comprises a PC, special Windows-based software, a printer and a plug -in peripheral as a vault to store postage funds. The PC meter uses a personal computer and its non-secure and non-dedicated printer to generate digital tokens and later print evidence of postage an envelopes and labels at the same time it prints a recipient address.

The present invention provides a token generation process for an open metering system that includes security that prevents tampering and false evidence of postage payment. The present invention further provides a token generation process that includes the ability to do batch processing of digital tokens.

In accordance with the present invention a method of issuing digital tokens in a open system meter includes the steps of sending a request for digital tokens and predetermined postal information, including addressee information, from a host processor to a vault that is operatively coupled to the host processor; calculating in the vault in response to the request for tokens at least one digital token using the predetermined postal information; debiting postal funds in the vault; issuing the digital token to the host processor; and storing the digital token and the predetermined postal information as a transaction record in the host processor for subse-

quent generation and printing of an indicia. The method further includes the steps of generating in the host processor an indicia comprising a graphical image of the digital token and the predetermined postal information and storing the indicia in the host processor; and printing the indicia on a mailpiece when requested.

The above and other objects and advances of the present invention will be apparent upon consideration of the following detailed description, taken in conjunction with accompanying drawings, in which like reference characters refer to like parts throughout, and in which:

Fig. 1 is a block diagram of a PC-based metering system in which the present invention operates;

Fig. 2 is a schematic block diagram of the PC-based metering system of Fig. 1 including a removable vault card and a DLL in the PC;

Fig. 3 is a schematic block diagram of the DLL in the PC-based metering system of Fig. 1 including interaction with the vault to issue and store digital tokens;

Fig. 5 is a flow chart of a digital token generation process of the present invention;

Fig. 4 is a block diagram of the DLL sub-modules in the PC-based metering system of Fig. 1;

Fig. 6 is a flow chart of the PC storing a transaction record including an issued digital token in the PC-based metering system of Fig. 1;

Fig. 7 is a flow chart of the PC generating an indicia image for a digital token in the PC-based metering system of Fig. 1; and

Fig. 8 is an representation of indicia generated and printed by the PC-based metering system of Fig. 1.

In describing the present invention, reference is made to the drawings, wherein there is seen in Figs. 1-4 an open system PC-based postage meter, also referred to herein as a PC meter system, generally referred to as 10, in which the present invention performs the digital token process. PC meter system 10 includes a conventional personal computer configured to operate as a host to a removable metering device or electronic vault, generally referred to as 20, in which postage funds are stored. PC meter system 10 uses the personal computer and its printer to print postage on envelopes at the same time it prints a recipient's address or to print labels for pre-addressed return envelopes or large mailpieces. It will be understood that although the preferred embodiment or the present invention is described with regard to a postage metering system, the present invention is applicable to any value metering system that includes a transaction evidencing.

As used herein, the term personal computer is used genetically and refers to present and future micro-processing systems with at least one processor operatively coupled to user interface means, such as a display and keyboard, and storage media The personal computer may be a workstation that is accessible by more than one user.

15

25

The PC-based postage meter 10 includes a personal computer (PC) 12, a display 14, a keyboard 16, and an non-secured digital printer 18, preferably a laser or ink-jet printer. PC 12 includes a conventional processor 22, such as the 80486 and Pentium processors manufactured by Intel, and conventional hard drive 24, floppy drive(s) 26, and memory 28. Electronic vault 20, which is housed in a removable card, such as PCMCIA card 30, is a secure encryption device for postage funds management, digital token generation and traditional accounting functions. PC meter system 10 may also include an optional modem 29 which is located preferably in PC 12. Modem 29 may be used for communicating with a Postal Service or a postal authenticating vendor for recharging funds (debit or credit). In an alternate embodiment the modern may be located in PCM-CIA card 30.

PC meter system 10 further includes a Windowsbased PC software module 34 (Figs. 3 and 4) that is accessible from conventional Windows-based word processing, database and spreadsheet application programs 36. PC software module 34 includes a vault dynamic link library (DLL) 40, a user interface module 42, and a plurality of sub-modules that control the metering functions. DLL module 40 securely communicates with vault 20 and provides an open interface to Microsoft Windows-based application programs 36 through user interface module 42. DLL module 40 also securely stores an indicia image and a copy of the usage of postal funds of the vault. User interface module 42 provides application programs 36 access to an electronic indicia image from DLL module 40 for printing the postal revenue block on a document, such as an envelope or label. User interface module 42 also provides application programs the capability to initiate remote refills and to perform administrative functions.

Thus, PC-based meter system 10 operates as a conventional personal computer with attached printer that becomes a postage meter upon user request. Printer 18 prints all documents normally printed by a personal computer, including printing letters and addressing envelopes, and in accordance with the present invention, prints postage indicia.

The vault is housed in a PCMCIA I/O device, or card, 30 which is accessed through a PCMCIA controller 32 in PC 12. A PCMCIA card is a credit card size peripheral or adapter that conforms to the standard specification of the Personal Computer Memory Card International Association. Referring now to Figs. 2 and 3, the PCMCIA card 30 includes a microprocessor 44, redundant non-volatile memory (NVM) 46, clock 48, an encryption module 50 and an accounting module 52. The encryption module 50 may implement the NBS Data Encryption Standard (DES) or another suitable encryption scheme. In the preferred embodiment, encryption module 50 is a software module. It will be understood that encryption module 50 could also be a separator device, such as a separate chip connected to microprocessor 44. Accounting module 52 may be

EEPROM that incorporates ascending and descending registers as well as postal data, such as origination ZIP Code, vendor identification, data identifying the PC-based postage meter 10, sequential piece count of the postal revenue block generated by the PC-based postage meter 10, postage amount and the date of submission to the Postal Service. As is known, an ascending register in a metering unit records the amount of postage that has been dispensed, i.e., issued by the vault, in all transactions and the descending register records the value, i.e., amount of postage, remaining in the metering unit, which value decreases as postage is issued.

The hardware design of the vault includes an interface 56 that communicates with the host processor 22 through PCMCIA controller 32. Preferably, for added physical security, the components of vault 20 that perform the encryption and store the encryption keys (microprocessor 44, ROM 47 and NVM 45) are nackaged in the same integrated circuit device/chip that is manufactured to be tamper proof Such packaging ensures that the contents of NVM 46 may be read only by the encryption processor and are not accessible outside of the integrated circuit device. Alternatively, the entire card 30 could be manufactured to be tamper proof.

The memory of each NVM 46 is organized into sections. Each section contains historical data of previous transactions by vault 20. Examples of the types of transactions include: postage dispensed, tokens issued, refills, configuration parameters, and postal and vendor inspections. The size of each section depends on the number of transactions recorded and the data length of the type of transaction. Each section in turn is divided into transaction records. Within a section, the length of a transaction record is identical. The structure of a transaction record is such that the vault can check the integrity of data.

The functionality of DLL 40 is a key component of PC-base meter 10. DLL 40 includes both executable code and data storage area 41 that is resident in hard drive 24 of PC 12. In a Windows environment, a vast majority of applications programs 36, such as word processing and spreadsheet programs, communicate with one another using one or more dynamic link libraries. PC-base meter 10 encapsulates all the processes involved in metering, and provides an open interface to vault 20 from all Windows-based applications capable of using a dynamic link library. Any application program 36 can communicate with vault microprocessor 44 in PCMCIA card 30 through DLL 40.

DLL 40 includes the following software sub-modules. Secure communications sub-module 80 controls communications between PC 12 and vault 20. Transaction captures sub-module 82 stores transaction records in PC 12. Secure indicia image creation and storage sub-module 84 generates an indicia bit map image and stores the image for subsequent printing. Application interface sub-module 86 interfaces with non-metering

application programs and issues requests for digital tokens in response to requests for indicia by the non-metering application programs. A more detailed description of PC meter system 10 is provided in related European Patent Application Serial No. [Attorney Docket E-421] filed concurrently herewith and incorporated herein in its entirety by reference.

Since printer 18 is not dedicated to the metering function, issued digital tokens may be requested, calculated and stored in PC 12 for use at a later time when, at a user's discretion, corresponding indicia are generated and printed. Such delayed printing and batch processing is described in more detail in co-pending European Patent Application Serial No. [Attorney Docket E-452], which is incorporated herein in its entirety by reference.

#### Digital Token Generation Process

In accordance with the present invention, then a request for digital token is received from PC 12, vault 20 calculates and issues at least one digital token to PC 12 in response to the request. The issued digital token is stored as part of a transaction record in PC 12 for printing at a later time. In the preferred embodiment of the present invention, the transaction record is stored in a hidden file in DLL storage area 41 on hard drive 24. Each transaction record is indexed in the hidden file according to addressee information. It has been discovered that this method of issuing and storing digital tokens provides an additional benefit that one or more digital tokens can be reissued whenever a token has not been printed or if a problem has occurred preventing a printing of an indicia with the token.

By storing digital tokens as part of transaction records in PC 12 the digital tokens can be accessed at a later time for the generation and printing of indicia which is done in PC 12. Furthermore, if a digital token is lost, i.e., not properly printed on a mailpiece, the digital token can be reissued from DLL 40 rather than from vault 20. The storage of transaction records that include vault status at the end of each transaction provides a backup to the vault with regard to accounting information as well as a record of issued tokens. The number of transaction records stored on hard drive 24 may be limited to a predetermined number, preferably including all transactions since the last refill of vault 20.

Referring now to Fig. 5, when power is applied, at step 200, to vault 20, i.e. when card 30 is inserted into controller 32, the vault initializes itself. At step 202, vault 20 checks the integrity of the funds stored in the redundant NVM 46. If bad, vault 20 sets itself into a disabled state, at step 204. If the NVM data is correct, then, at step 206, the registers related to postal funds, i.e., the ascending, descending and piece count registers, are loaded to RAM 45 and the most recent transaction record is also loaded into RAM 45. After verifying the data integrity of NVM 46 and copying the most recent records into vault's RAM 45, vault 20 is initialized and

thereafter waits for an external command, at step 208.

When a status command is received, at step 210, vault 20 replies to PC 12 with its current status, at step 212. If a password is required to access vault 20 functions, at step 216 an entered password is checked for correctness.

When a command to set the date is received, at step 218, for the first time in a particular month, the vault, at step 220, sets the date and derives token generation keys for the month from master keys stored in NVM 46 of the vault. The vault then enables itself and is ready to receive a token request command. Once the date is set, when another date set command is received in the same month, the vault simply acknowledges the command and sets the date without re-calculating the token generation keys. At step 224, a postage command is received and a postage value, for example, \$.32, is set at step 226.

When a token request command comprising a destination postal code is received by vault 20, at step 228, it checks the format of and the range of values in the request at steps 234-240. If the request is improper, vault 20 rejects the request and sends a status message to user application program 36 via DLL 40 at step 212. Vault 20 checks the date in the request, at step 234, and then compares, at step 236, the requested postage amount with the two warning values: high value warning and the postage limit amount. If the request exceeds the warning values, the request is rejected. Vault 20 then compares, at step 238, the requested postage amount with available postal funds in the descending register. If the amount of available postal funds is smaller than the requested amount, the vault rejects the token request command and sends an appropriate message to user application program 36 via DLL 40. If the amount of available postal funds is greater than or equal to the requested amount, vault 20 checks the destination information at step 240.

Finally, at step 242 vault 20 begins the accounting process to issue a digital token. Vault 20 deducts the requested postage amount from the available postal funds, i.e., adds the amount to the ascending register and subtracts the amount from the descending register. in RAM. At step 244 a digital token is calculated using an open system algorithm which includes addressee information. At step 246, vault 20 constructs in RAM 45 a transaction record that includes the piece count and the calculated token and stores the transaction record in an indexed file in the redundant NVM 46. In the preferred embodiment, the NVM transaction file is indexed by piece count. After storing to NVM, vault 20 checks, at step 248, the integrity of NVM 46 to confirm that the data is stored correctly. If an error occurs during this process, tokens are not issued and an error message is reported to the host processor in PC 12. If no error occurs, a transmission buffer that consists of the transaction record is assembled and vault 20 transmits, at step 250, the transaction record to DLL 40 in PC 12. If vault 20 does not receive a positive acknowledgment

45

from PC 12, vault 20 retransmits the message.

Conventional postage meters store transactions in the meter. In accordance with the present invention, Transaction Capture sub-module 82 captures each transaction record received from vault 20 and records 5 the transaction record in DLL 40 and in DLL storage area 41 on hard drive 24 for a historical record. If there is ample room on hard drive 24, such transaction captures can be stored for a plurality of different vaults. Referring now to Fig. 6, from the moment that a communication session is established, Transaction Capture sub-module 82 monitors message traffic at step 120, selectively captures each transaction record for token generations and refills, and stores such transaction records in DLL 40 at step 124 in an invisible and writeprotected file 83 in DLL storage area 41 at step 126. The information stored for each transaction record includes, for example, vault serial number, date, piece count, postage, postal funds available (descending register), tokens, destination postal code and a block check character. A predetermined number of the most recent records initiated by PC 12 are stored in file 83 which is an historical file indexed according to piece count. File 83 represents the minor image of vault 20 at the time of the transaction except for the encryption keys and configuration parameters. Storing transaction records on hard drive 24 provides backup capability which is described below. In accordance with the present invention transaction records are maintained for a plurality of issued digital tokens for a predetermined time or count.

In accordance with the present invention, the entire fixed graphics image 90 of the indicia 92, shown in Fig. 8 is stored as compressed data 94 in DLL storage area 41. Postal data information, including piece count 93a, vendor ID 93b, postage amount 93c, serial number 93d, date 93e and origination ZIP 93f and tokens 93g are combined with the feed graphics image 90 by Indicia Image Creation Module 84.

Referring now to Fig. 7, when a request for indicia is made from an application program in PC 12 at step 142, Indicia Image Creation Module 84 checks for a digital token from vault 20 at step 144, and at step 146 generates a bit-mapped indicia image 96 by expanding the compressed feed graphics image data 94 at step 148 and combining at step 150 the indicia's feed graphics image 90 with some or all of the postal data information and tokens received from vault 20. At step 152, the indicia image is stored in DLL 40 for printing. Sub-module 84 sends to the requesting application program 36 in PC 12 the created bit-mapped indicia image 96 that is ready for printing, and then stores a transaction record comprising the digital tokens and associated postal data in DLL storage area 41. At this time, the indicia can be printed immediately or at a later time.

Thus, the bit-mapped indicia image 96 is stored in DLL 40 which can only be accessed by executable code in DLL 40. Furthermore, only the executable code of DLL 40 can access the fixed graphics image 90 of the indicia to generated bit-mapped indicia image 96. This

prevents accidental modification of the indicia because it would be very difficult for a normal user to access, intentionally or otherwise, the fixed graphics image 90 of the indicia and the bit-mapped indicia image 96.

The present invention is suitable for generating a batch of tokens for addresses in a mailing list rather than entering such list of addresses one at a time. The batch of tokens are part of a batch of transaction records, that are indexed in the transaction file in the DLL storage area 41, which are later used to generate indicia images when printing envelopes for the mailing list. Such batch processing would be useful, for example, to production mailers which often have databases of addresses from which to generate mail. These databases are usually pre-processed and sorted to take advantage of postal discounts and recipient profiles for direct marketing opportunities.

In an alternate embodiment, a PC-based open metering system is part of a network with the vault connected to a server PC and the user requesting postage from a user PC. The token generation process would proceed as previously described except that the vault functions, including token generation, would occur in the server PC or the vault card connected thereto. The server PC also stores a record of all transactions for backup and disaster recovery purposes. The user PC would store the transaction records, including issued tokens, on its hard drive and would generate indicia corresponding thereto. This configuration would allow multiple users to send a letter to the same addressee without the token generation being inhibited.

While the present invention has been disclosed and described with reference to a single embodiment thereof, it will be apparent, as noted above that variations and modifications may be made therein. It is, thus, intended in the following claims to cover each variation and modification that falls within the true spirit and scope of the present invention.

In the foregoing, the following attorney docket references indicate the US-applications shown in the following table. All these applications have corresponding European Applications and are hereby incorporated herein by reference:

5	E-415	Serial No. 08/575,106
	E-416	Serial No. 08/575,107
	E-417	Serial No. 08/574,746
	E-418	Serial No. 08/574,745
	E-419	Serial No. 08/575,110
0	E-420	Serial No. 08/574,743
	E-421	Serial No. 08/575,112
	E-444	Serial No. 08/575,109
	E-452	Serial No. 08/575,104
	E-463	Serial No. 08/574,749
5	E-466	Serial No. 08/575,111
	E-462	Serial No. 08/588,499

10

20

30

45

50

55

#### Claims

 A method of issuing digital tokens in a open system meter comprising the steps of:

11

sending a request for digital tokens and predetermined postal information, including addressee information, from a host processor to a vault that is operatively coupled to the host processor;

calculating in the vault in response to the request for tokens at least one digital token using the predetermined postal information; debiting postal funds in the vault;

issuing the digital token to the host processor; and

storing the digital token and the predetermined postal information as a transaction record in the host processor for subsequent generation and printing of an indicia.

The method of claim 1 comprising the further steps of:

> generating in the host processor an indicia comprising a graphical image of the digital token and the predetermined postal information and storing the indicia in the host processor;

> printing the indicia on a mailpiece when requested.

- The method of claim 1 wherein the step of storing the digital token and the predetermined postal information as a transaction record in the host processor includes indexing the transaction record corresponding to piece count.
- The method of claim 1 comprising the further step of reissuing the digital token from the hard drive if 40 the indicia has not been printed.
- 5. The method of claim 1 comprising the further step

repeating the steps in claim 1 for a batch of addressees before printing an indicia for each digital token corresponding to each of the addressees.

6. The method of claim 1 comprising the further step of:

maintaining a plurality of issued digital tokens for a predetermined time or count.

7. The method of claim 1 comprising the further step of:

repeating the steps in claim 1 to obtain a batch of digital tokens stored on the hard drive for subsequent batch generation of indicia.

8. A method of issuing digital tokens in a open system meter comprising the steps of:

> sending a request for digital tokens and predetermined postal information, including addressee information, from a host processor to a vault that is operatively coupled to the host processor;

> calculating in the vault in response to the request for tokens at least one digital token using the predetermined postal information; debiting postal funds in the vault;

sending the digital token to the host processor: generating in the host processor a graphical image of the digital token and the predetermined postal information; and

storing the graphical image of an indicia comprising the digital token and the predetermined postal information for subsequent printing of the indicia; and

storing in the server PC a record of each transaction as backup for disaster recovery.

9. A method of issuing digital tokens in a PC meter on a network, comprising the steps of:

> sending a request for digital tokens and predetermined postal information, including addressee information, from a local PC to a vault operatively connected to a network server;

> generating in the vault in response to the request for tokens at least one digital token using the predetermined postal information; storing the digital token in NVM in the vault; sending the digital token to the local PC; storing the digital token and the predetermined postal information in a transaction record file in the local PC for subsequent generation and printing of an indicia.

10. A method of issuing a batch of digital tokens, the method comprising the steps of:

providing a mailing list file in a PC; extracting required postal information for each desired address in a mailing list sending a request for digital tokens and the required postal information, including addressee information, for desired ones of the addresses in the mailing list from the PC to a vault that is operatively coupled to the PC; calculating in response to each request for digital tokens at least one digital token in the vault using the predetermined postal information;

7

storing each digital token in vault NVM in the vault;

debiting postal funds in the vault NVM corresponding to the digital tokens calculated for each address;

sending each digital token to the processor;

storing each digital token in an issued token file on the hard drive of the PC in a manner consistent with the order that each corresponding 10 address is in the mailing list for subsequent generation and printing of an indicia.

11. The method of claim 10 comprising the further steps of:

> generating an indicia bitmap comprising the digital token for one of the digital tokens in the issued token file;

> formatting an envelope print routine including the indicia bitmap in response to a print command;

printing an envelope in accordance with the formatted envelope print routine;

storing the indicia bitmap in a bitmap file on the 25 hard drive for subsequent printing; and repeating the previous steps until indicia are printed for all desired addressees in the mailing list.

5

15

30

35

40

45

50

55

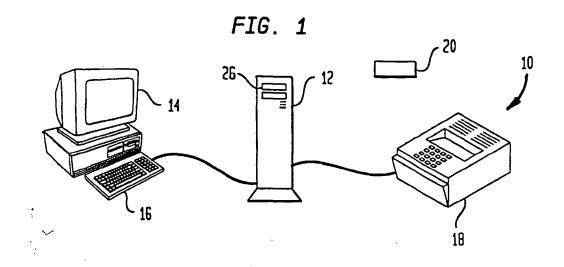
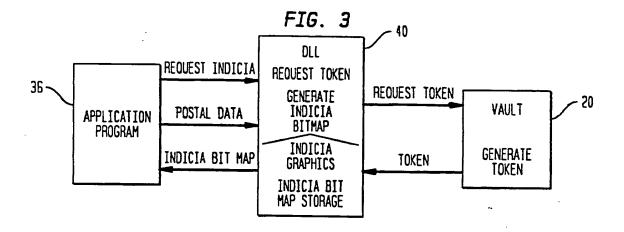


FIG. 2 12 20 . PC 22 -30. MEMORY 58 PCMCIA CARD **PROCESSOR** APPLICATION 44 -26 -PROGRAMS 36 **MICROPROCESSOR** 42 **FLOPPY** 45 -DRIVES USER INTERFACE RAM 32 -58~ **PCMCIA DLL 40** PCMCIA INTERFACE 46 -CONTROLLER APPLICATION NVM INTERFACE MODULE 66 47 -HARD DRIVE ROM 24 -SECURE MODEM (OPTIONAL) COMMUNICATIONS 48-MODULE 60 **CLOCK** 50 -TRANSACTION **ENCRYPTION** DLL STORAGE 41 52 -CAPTURE MODULE 62 **ACCOUNTING** 29-SECURE INDICIA MODEM MODULE 64



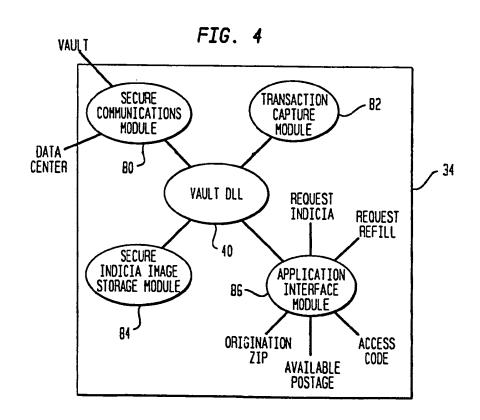


FIG. 5A

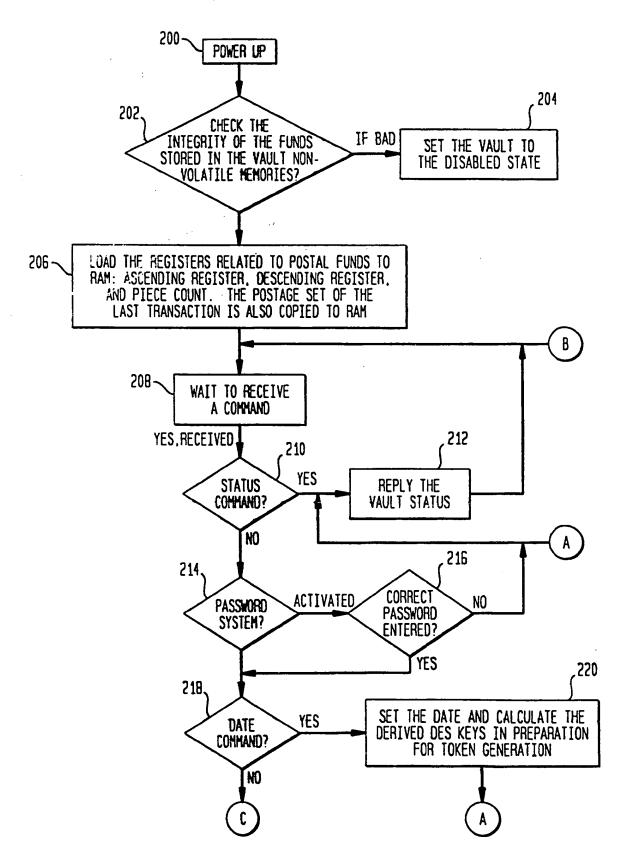
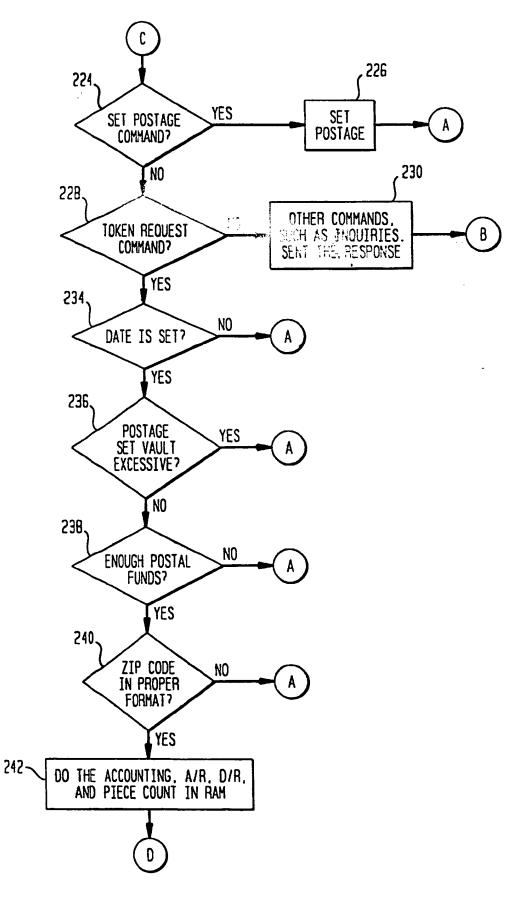
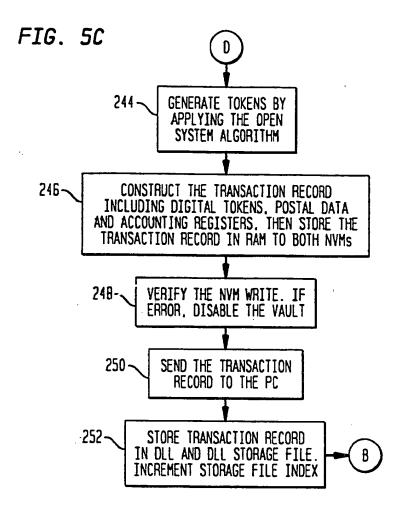


FIG. 5B






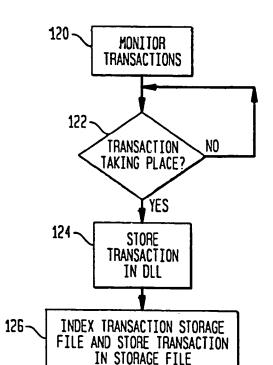


FIG. 6



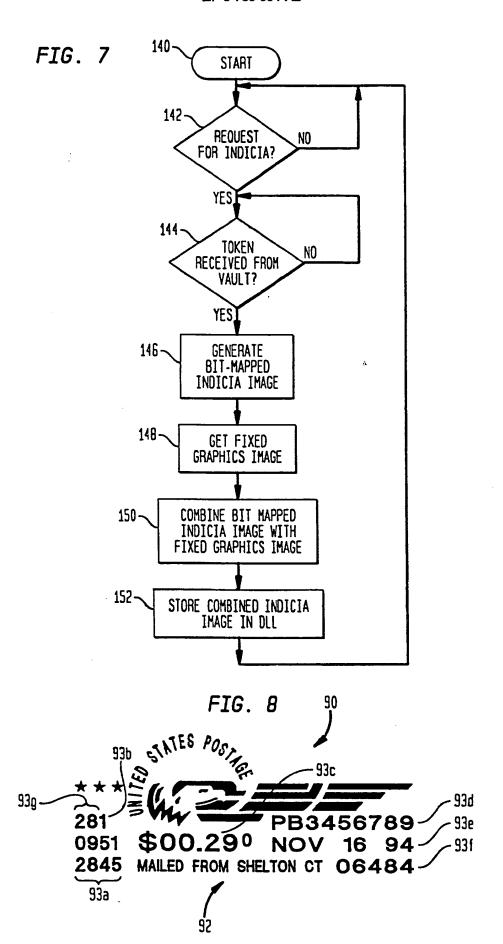

#### **Europäisches Patentamt**

**European Patent Office** 

Office européen des brevets



EP 0 780 804 A3

(12)

#### **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3: 24.05.2000 Bulletin 2000/21

(51) Int. Cl.7: G07B 17/02

(11)

(43) Date of publication A2: 25.06.1997 Bulletin 1997/26

(21) Application number: 96120495.5

(22) Date of filing: 19.12.1996

(84) Designated Contracting States: DE FR GB

(30) Priority: 19.12.1995 US 575107

(71) Applicant: PITNEY BOWES INC.
Stamford Connecticut 06926-0709 (US)

(72) Inventors:

Lee, David K.
 Monroe, CT 06468 (US)

Riley, David W.
 Easton, CT 06612 (US)

 Ryan, Frederick W., Jr. Oxford, CT 06478 (US)

(74) Representative:
Avery, Stephen John et al
Hoffmann Eitle,
Patent- und Rechtsanwälte,
Arabellastrasse 4
81925 München (DE)

## (54) Token generation process in an open metering system

(57) A method of issuing digital tokens in a open system meter comprising the steps of:

sending a request for digital tokens and predetermined postal information, including addressee information, from a host processor to a vault that is operatively coupled to the host processor; calculating in the vault in response to the request for tokens at least one digital token using the predetermined postal information;

debiting postal funds in the vault;

issuing the digital token to the host processor; and storing the digital token and the predetermined postal information as a transaction record in the host processor for subsequent generation and printing of an indicia.

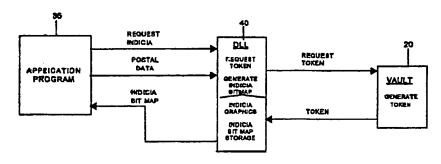


FIG. 3



# **EUROPEAN SEARCH REPORT**

Application Number EP 96 12 0495

Category	Citation of document with it of relevant pass	ndication, where appropriate, ages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CL6)
P,X, L A	EP 0 741 374 A (PIT 6 November 1996 (19 * abstract *  * column 5, line 3 * column 6, line 49 * column 12, line 3 * column 13, line 2 * figures 2,6,9 * L: priority	96-11-06) - line 23 * - column 7, line 39 * - line 38 * 2 - line 48 *	9,10 2,5,7,8, 11	G07B17/02
A	4 October 1988 (198 * abstract * * column 5, line 17	- column 6, line 16 * - column 14, line 10		
A	10 October 1989 (19 * abstract * * column 3, line 10 * column 4, line 6	·	1-11	TECHNICAL PIELDS SEARCHED (INLCLS) G07B
E	EP 0 775 987 A (NE0 28 May 1997 (1997-0 * abstract * * column 3, line 32 * figures 1-4 *		1,3,9	
	The present search report has	<u> </u>		
	THE HAGUE	Date of exceptation of the search 4 April 2000	Van	Dop, E
X : per Y : per doo A : teol	ATEGORY OF CITED DOCUMENTS foularly relevent if taken elone foularly relevent if combined with end ument of the seme category trological background —witten declosure	E : earlier paient after the filing her D : document ch	ed in the application id for other reasons	lehed on, or

### ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 96 12 0495

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-04-2000

	Patent document olted in search repo		Publication date		Patent family member(s)	Publication date
	EP 0741374	A	06-11-1996	US	5675650 A	07-10-1997
İ				CA	2175121 A	03-11-1996
				CA	2175406 A	03-11-1996
1				EP	0741375 A	06-11-1996
ı				JP	9167265 A	24-06-1997
				JP	9106424 A	22-04-1997
	US 4775246	A	04-10-1988	US	4757537 A	12-07-1988
				ÂU	588308 B	14-09-1989
	•			AU	5634786 A	23-10-1986
				BP.	8601837 A	23-12-1986
-				CA	1258916 A	29-08-1989
1				CH	675496 A	28-0 <del>9-</del> 1990
-				DE	3613007 A	23-10-1986
				FR	2580845 A	24-10-1986
				GB	2173742 A,B	22-10-1986
1				IT	1214679 B	18-01-1990
				AU	584187 B	18-05-1989
				AU	5634586 A	23-10-1986
1				AU	590752 B	16-11-1989
				AU	5634686 A	23-10-1986
				BR	8601838 A	23-12-1986
				BR	8601839 A	23-12-1986
				CA	1259704 A	19-09-1989
1				CH	672378 A	15-11-1989
1				CH	674098 A	30-04-1990
				DE	3613008 A	13-11-1986
				DE	3613025 A	23-10-1986
				FR	2580843 A	24-10-1986
				FR	2580844 A	24-10-1986
				GB	2173741 A,B	22-10-1986
1				GB	2174039 A,B	29-10-1986
				IT	1190272 B	16-02-1988
1				IT	1221060 B	21-06-1990
ŀ				JP	62058388 A	14-03-1987
				ijΡ	61292790 A	23-12-1986
1				JP	61292791 A	23-12-1986
				ŽÀ	8602803 A	30-12-1986
1				ZA	8602804 A	30-12-1986
				ZA	8602805 A	30-12-1986
-	110 4670645		40.40.400			
	US 4873645	Α	10-10-1989	AU	2513288 A	29-06-1989
				CA	1295738 A	11-02-1992
				CH	678986 A	29-11-1991
<b>\$</b>				DE	3841394 A	29-06-1989
FORM PO469				FR	2625003 A	23-06-1989
ע נ						

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

### ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 96 12 0495

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-04-2000

Patent document cited in search report		Publication date	Publication date Patent family member(s)  GB 2211144 A, B  IT 1224800 B  JP 1191994 A  SE 8804235 A		Publication date
US 487364	4873645 A				28-06-19 24-10-19 02-08-19 23-11-19
EP 077598	7 A	28-05-1997	us	5778066 A	07-07-19